

This is a postprint version of the following published document:

Sanchez-Reillo R., Tamer S. (2015) Hand Data Interchange Format, Standardization. In: Li S.Z., Jain A.K. (eds.) *Encyclopedia of Biometrics*. Springer, Boston, MA

DOI: [https://doi.org/10.1007/978-1-4899-7488-4\\_306](https://doi.org/10.1007/978-1-4899-7488-4_306)

© Springer Science+Business Media New York 2015

## Metadata of the chapter that will be visualized online

---

Chapter Title	Hand Data Interchange Format, Standardization	
Copyright Year	2014	
Copyright Holder	Springer-Verlag London	
Corresponding Author	Family Name	<b>Sanchez-Reillo</b>
	Particle	
	Given Name	<b>Raul</b>
	Suffix	
	Division	GUTI (University Group for Identification Technologies)
	Organization	Carlos III University of Madrid
	Address	28911, Avda. Universidad, 30, Leganes, Madrid, Spain
	Email	rsreillo@ing.uc3m.es
	Email	raul.sanchezreillo@gmail.com
	Corresponding Author	Family Name
Particle		
Given Name		<b>Samir</b>
Suffix		
Organization		Ingersoll Rand Recognition Systems
Address		Dell Avenue, Campbell, CA, USA
Email		samir_tamer@irco.com

---

# Hand Data Interchange Format, Standardization

Raul Sanchez-Reillo<sup>\*a</sup> and Samir Tamer<sup>†b</sup>

<sup>a</sup>GUTI (University Group for Identification Technologies), Carlos III University of Madrid, Leganes, Madrid, Spain

<sup>b</sup>Ingersoll Rand Recognition Systems, Campbell, CA, USA

Q1

## Synonyms

[Encoding of hand geometry information](#); [Hand silhouette data](#)

## Definition

Standard that defines a common format to code information related to hand geometry-based biometrics. This format is defined to allow interoperability among different vendors worldwide and has been developed by the international community taking part in ISO/IEC JTC1/SC37 standardization subcommittee.

## Introduction

Subcommittee SC37 from ISO/IEC JTC1 deals with the standardization of biometrics. Among SC37, Working Group 3 is devoted to define Interchange Data Formats for biometric modalities, among other duties. For that purpose, a multipart standard is under development, and it is referred to by the number ISO/IEC 19794. Part 10 of the multipart standard covers hand geometry biometrics and is denoted ISO/IEC 19794-10. The full title is “Information technology – Biometric data interchange formats – Part 10: Hand geometry silhouette data” [1].

This international standard provides a data interchange format, based on a CBEFF data block [2], for applications requiring an interoperable hand geometry record. The information consists of a variety of mandatory and optional items, including data capture parameters, standardized hand position, and vendor-specific information. This information is intended for interchange among organizations that rely on automated devices and systems for identification or verification purposes based on the information from hand geometry.

It is important to note that although this part of ISO/IEC 19794 mandates a particular data format, it does not mandate a particular algorithm. For example, a user may be enrolled on a system from one vendor and verified on a system from another.


Also, an important issue is that this format stores hand silhouette data rather than color or grayscale image data. To increase the flexibility of the data format, provisions have been made to store views of the left and right hands, in addition to multiple views of each hand.

Specific implementations of this part of ISO/IEC 19794 that could be constrained by storage space or transmission capability (such as smart card applications) may wish to limit the number

---

\*E-mail: rsreillo@ing.uc3m.es, raul.sanchezreillo@gmail.com

†E-mail: samir\_tamer@irco.com

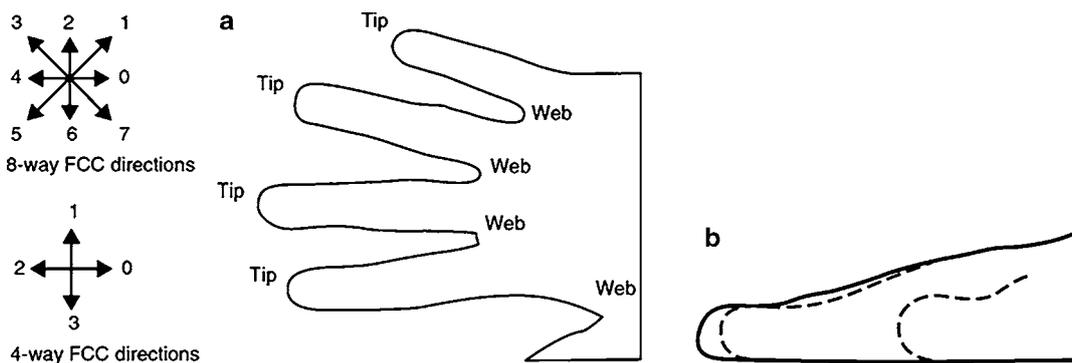

**Fig. 1** Standard hand orientation images: (a) top view, (b) side view (Images taken from [1])

of views stored for each hand. Such limitations are outside the scope of this part of ISO/IEC 19794, but authors of the international standard advise that the reduced choices can prejudice interoperability.


### Silhouette Acquisition Requirements

The capture device as well as the capture process is out of the scope of the standard. As already mentioned, this is not an image-based standard but one related to the coding of the shape of the hand. Therefore, no matter what camera has been used for acquiring the sample (black and white, color, resolutions, etc.) or which algorithm has been used for preprocessing such image, the primary input for this document is such preprocessed image, showing the silhouette of the hand captured. This silhouette can be either the one referring to the top view of the hand or its side view. Figure 1 shows the standardized orientation of both types of view.

The hand silhouette will be represented in this standard as a sequence of points showing the direction to the next point in the silhouette (what is called a Freeman Chain Code or FCC). In order to code the FCC in an interoperable way, a set of requirements have to be defined:

- The basic requirement is that aspect ratio shall be 1:1, with an error less than  $\pm 2\%$ .
- The starting point shall be in the rightmost column of the silhouette in Fig. 1, at the uppermost row occupied by the silhouette in that column (i.e., the upper right corner of the silhouette). Successive points shall trace the outline in a counterclockwise direction.
- The silhouette shall be a closed shape (i.e., it shall have no gaps in the outline, and the final outline point shall be common to the starting point).
- The starting point shall occur exactly twice in the silhouette, as the first and last points only (the silhouette will not cross through the starting point at any other time).
- The right column shall be vertical (i.e., the penultimate point shall occur directly below the starting point, and no points occur to the right of the starting point).

The orientation of the camera while capturing the image is quite important. Figure 2 shows the coordinate system when dealing with the camera point of view. This is really significant for some data to be stated in the record to be coded.

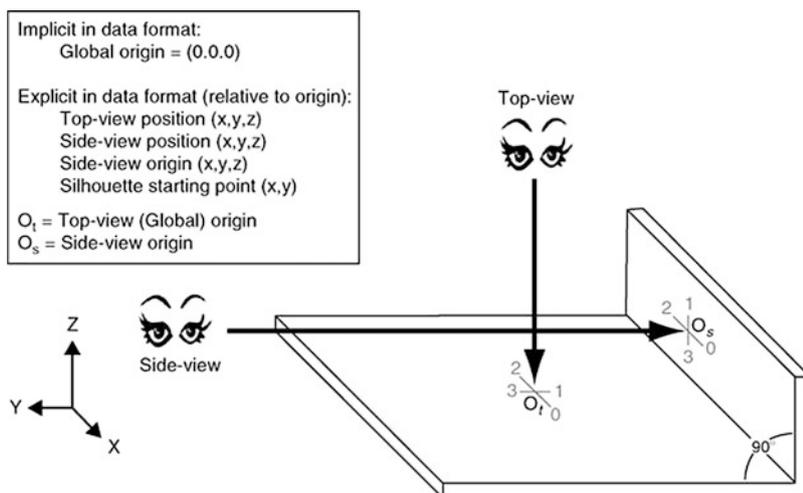

**Fig. 2** Coordinate system linking top and side views, referred to the 4-FCC directions (Image taken from [1])

## Record Format

After defining the set of requirements for image acquisition, the Standard defines the way such information has to be coded and stored within a CBEFF-compliant wrapper. The structure to be followed is:

- A fixed-length (15-byte) general record header containing information about the overall record, with the following fields:
  - Format identifier (4 bytes with the hexadecimal value 0x484E4400) and version number (coded in another 4 bytes)
  - Record length (in bytes) including all hand views within this record (coded in 4 bytes)
  - Number of hand views (HGVRs) (1 byte)
  - 2 bytes reserved for future use
- One or more variable-length Hand Geometry View Records (HGVRs), each containing a single-hand silhouette, consisting of:
  - A fixed-length (25-byte) hand view header contains the following information:
    - Length of the HGVR (in 2 bytes)
    - HGVR index (in 1 byte)
    - Hand identifier (1 byte), which indicates the fingers that the system attempts to acquire within the silhouette, and the view of the hand (top view of the palm, top view of the back of the hand, side view from the thumb side, or side view from the little finger side)
    - Hand Integrity (1 byte), which shows the identified problems in the sample acquired (e.g., finger missing, misplacement, etc.)
    - Data resolution in pixels per centimeter (1 byte)
    - Geometric distortion of the system, as a signed value incrementing 0.1 % (1 byte)

- Silhouette quality (3 bytes), with being 0 the lowest quality and 100 the highest possible quality, always coded in the lower byte, while the higher 2 bytes are reserved for the future use
  - Camera position relative to the global origin (1 byte for X position, 1 byte for Y position, and 1 byte for Z position)
  - Target position relative to the global origin (1 byte for X position, 1 byte for Y position, and 1 byte for Z position)
  - Silhouette starting point relative to the view origin (1 byte for X position and 1 byte for Y position)
  - Data compression algorithm (1 byte), which currently refers to only 2 coding methods, such as 8-way FCC and 4-way FCC
  - Hand scanning technology (1 byte), giving information whether the image was acquired using an optical camera, a linear scanning array, or no information is specified
  - Extended data length (2 bytes)
  - 3 bytes reserved for future use
- Silhouette data, encoded using a Freeman Chain Code (FCC), either using 8-way FCC, or 4-way FCC (depending on what is declared in the “data compression algorithm” field at the HGVR header)
  - Extended data (optional), for any application-specific or proprietary data used by the system vendor

For further details, refer to the current version of this International Standard [1]. Current version also provides a record sample, as well as an informative annex related to the best practices in this biometric modality, including hand placement and platen and optical design.

## Other Related Standards

There are other standards related to this technology, born under ANSI/INCITS scope. This is ANSI/INCITS 396-2005 – “Information Technology: Hand Geometry Interchange Format.” This standard is extremely similar to ISO/IEC 19794-10, where the major technical differences are:

- Within the General Header:
  - ANSI/INCITS 396 includes a CBEFF Product Identifier.
  - ANSI/INCITS 396 version number is a binary byte, while in 19794-10 is a 4-byte string.
- Regarding the View Header:
  - ANSI/INCITS 396 has a creation date that was dropped by ISO 19794-10.
  - 19794-10 adds a view index that associates multiple views of the same hand (such as a top view and side view captured at the same time).
  - 19794-10 adds a Hand Integrity field that indicates which fingers are okay and which are missing/mangled.

- 19794-10 adds a starting-point location linking the absolute position of the silhouette to the camera's optical axis.
- 19794-10 supports 4-way or 8-way FCCs, where ANSI/INCITS 396 only supports 8-way.

Due to the fact that the International Standard ISO/IEC 19794-10 is already available, INCITS has withdrawn ANSI/INCITS 396-2005.

## Summary

To provide interoperability in storing and transmitting hand geometry-related biometric information, one international standard has been developed. Beyond this International Standard, other standards deal with conformance and quality control, as well as interfaces or performance evaluation and reporting (see relevant entries in this Encyclopedia for further information).

## Related Entries

- ▶ [Biometric Data Interchange Format](#)
- ▶ [Common Biometric Exchange Framework Formats](#)
- ▶ [Hand Geometry](#)
- ▶ [Hand-Geometry Device](#)
- ▶ [Palm Vein](#)

## References

1. ISO/IEC: 19794-10:2007, Information technology – biometric data interchange formats – part 10: hand geometry silhouette data (2007)
2. ISO/IEC: 19785-1:2005, Information technology – common biometric exchange formats framework – part 1: data element specification (2005)

**Author Queries**

<b>Query Refs.</b>	<b>Details Required</b>
Q1	Please check if author affiliations are okay.